

Project Name		Product Code	
Job Location		Date	
Notes			

SPECIFICATIONS

POLE SHAFT

The pole shaft is fabricated from hot rolled welded steel tubing of one-piece construction with a minimum yield strength of 55 KSI. Wall thickness available in 11 gauge (.120") or 7 gauge (.180").

POLE TOP

Options include tenon top, drilled for side mount fixtures, and a removable pole cap is provided.

ANCHOR BOLTS

Anchor bolts conform to ASTM F1554 Grade 55 and are provided with 4 hex nuts and 4 flat washers. Bolts have an "L" bend on one end and are galvanized.

HAND HOLE

A reinforced hand hole with grounding provision is provided at 18" from the base on side A. Every hand hole includes a cover and cover attachment hardware. The hand hole has a nominal dimension of 3" x 5".

BASE COVER

Poles are provided With a two-piece formed steel base cover that is easily assembled and fitted over pole base (optional).

FINISH/COLOR

Exterior of pole and base plate are protected by powder-coated over galvanization finish. Standard finish are Black, Dark Bronze, Silver Gray, and White. Premium finish are Pine Green, and Corten Brown.

POLE LENGTH



Poles are Available in Standard Lengths as Shown in the Order Matrix.

MOUNTING OPTIONS

Welded 2-3/8" tenon for post top luminaire slip fit mounting.

WARRANTY

Structural warranty of five (5) years and a finish/paint warranty of three (3) years.

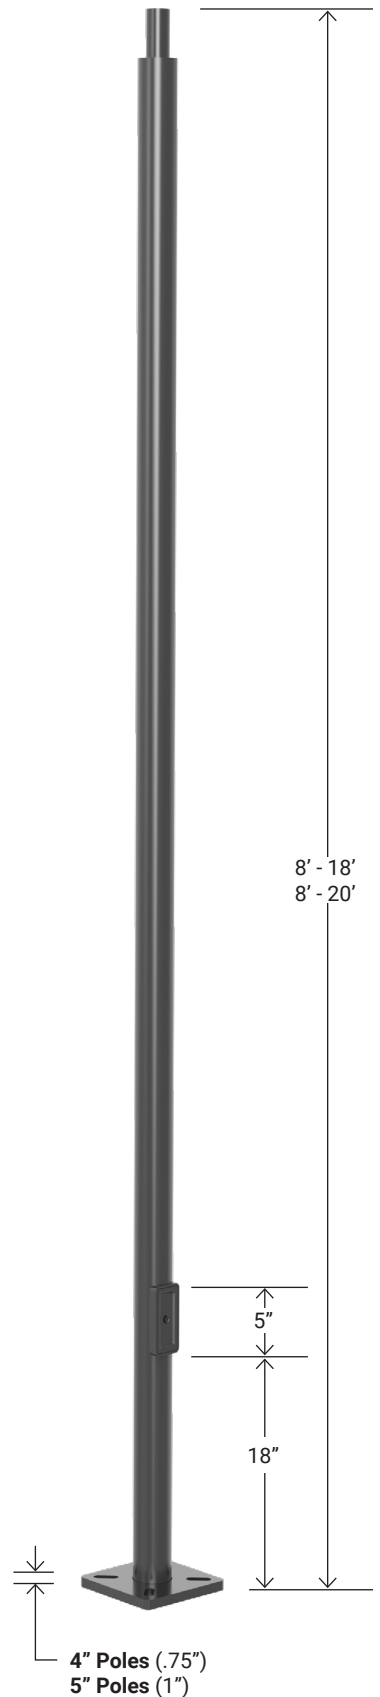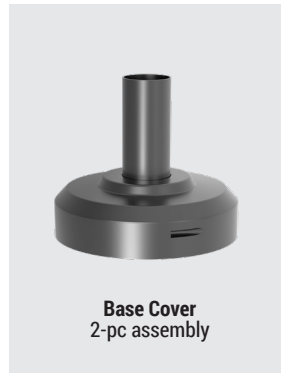

STANDARD COLOR



PREMIUM COLOR

